

$A = 2.54 * \text{NO of Positions} / 2 + 4.70$
 $B = 2.54 * \text{NO of Positions} / 2 - 2.54$

NOTES:

Current Rating : 1.0AMP
 Contact Resistance : 20mΩ MAX
 Withstand Voltage : 1000V AC/DC
 Insulation Resistance : 1000MΩ Min
 Operation Temperature : -40°C to +105°C


Contact Material : Brass Or Phosphor Bronze
 Contact plating : Au Or Sn over Ni
 Insulator Material : PBT +30%G.F UL94V-0

6P Without Slot " M " and " N "
 8P-12P Without Slot " M " , Without and " N "
 14P-64P With Slot " M " and " N "



Ordering Inforination


PY6201- XX	B	01	B	W	02
Series NO.	No. of Pos	Color Insulator	Contact Material	Piece	
06P 26P	08P 30P	B=Black	B=Brass	02=Two piece	
10P 34P	12P 36P	G=Grey	P=Phosphor Bronze	03=Three piece	
14P 40P	16P 44P		Contact Plating	Bump	
18P 50P	20P 60P		01=Gold Flash/Ni	W=With Bump	
22P 64P	24P		02=Sn	N=W/O Bump	
			03=3u"Gold/Ni		
			05=5u"Gold/Ni		
			15=15u"Gold/Ni		
			30=30u"Gold/Ni		

Three piece
 SR P/N:PY6201-XXBXXBX03A

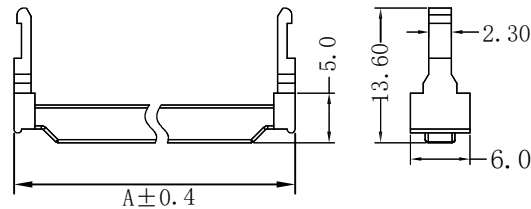

Three piece
 SR P/N:PY6201-XXBXXBX03B

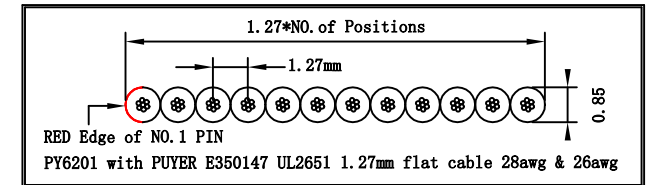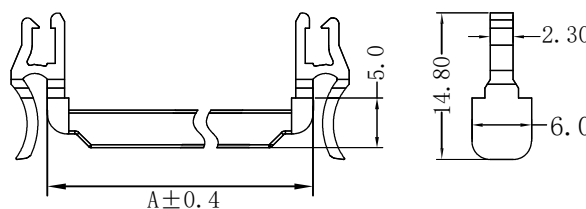

				OPERATION		DRAW	DATE 2016/06/27	SCALE	FIT	PART NO. PY6201-XXB01BW03A	 普亚电线有限公司 PUYER CABLE CO., LTD HTTP:www.puyercable.com
				X.	±0.20						
				X. X	±0.15	CHECK	DATE	UNIT	mm	TITLE: 2.54 IDC SOCKET+SR	普亚电线 TEL:0769-85258775 FAX:0769-85251396 MOB:13711962670 QQ :405131416
AO	2016/06/27	NEW		X. XX	±0.10	APPROVE	DATE	SIZE	A4	Customer NO.	思展连接器 TEL:0769-85338949 FAX:0769-85338969 MOB:13925839158 QQ :530589692
REV	DATE	MODIFICATON DESCRIPTION	CHANGE	ANGLES	±2°			SHEET	1/1		
				DIM	TOL			PROJ.	