

A=1.27*NO of Positions+4.20
B=1.27*NO of Positions-1.27


NOTES:

Current Rating : 1.0AMP
Contact Resistance : 20mΩ MAX
Withstand Voltage : 250V AC/DC
Insulation Resistance : 1000MΩ Min
Operation Temperature : -40°C to +105°C

Contact Material : Phosphor Bronze
Contact plating : Au Or Sn over Ni
Insulator Material : PBT +30%G.F UL94V-0

Ordering Information

PY4201- XX	B	01	W 01
Series NO.	No. of Pos	Color	Bump
	06P 26P	Insulator	W=With Bump
	08P 30P	B=Black	N=W/O Bump
	10P 34P		
	12P 40P	Contact Plating	
	14P 44P	01=Gold Flash/Ni	
	16P 50P	02=Sn	
	18P 60P	03=3u"Gold/Ni	
	20P 64P	05=5u"Gold/Ni	
	22P 80P	15=15u"Gold/Ni	
	24P	30=30u"Gold/Ni	

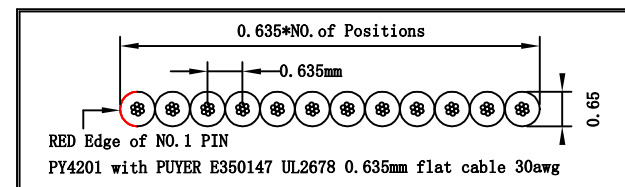

				OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
				X.	±0.20	2016/06/27	UNIT	mm	PY4201-XXB01W01
				X.X	±0.15	DATE	SIZE	A4	TITLE:
AO	2016/06/27	NEW		X.XX	±0.10	DATE	SHEET	1/1	127mm IDC SOCKET
REV	DATE	MODIFICATON DESCRIPTION	CHANGE	ANGLES	±2°	DATE	PROJ.		Customer NO.
				DIM	TOL				

PUYER 普亚电线有限公司
PUYER CABLE CO., LTD
HTTP: www.puyercable.com

普亚电线
TEL: 0769-85258775
FAX: 0769-85251396
MOB: 13711962670
QQ: 405131416

思展连接器
TEL: 0769-85338949
FAX: 0769-85338969
MOB: 13925839158
QQ: 530589692