

A=1.27*NO of Positions/2+4.19
B=1.27*NO of Positions/2-1.27

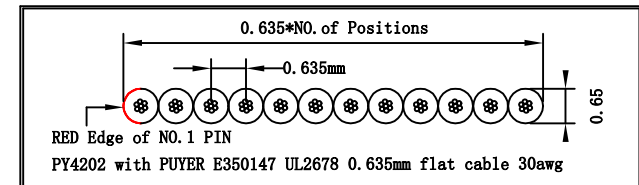
NOTES:
Current Rating : 1.0AMP
Contact Resistance : 20mΩ MAX
Withstand Voltage : 250V AC/DC
Insulation Resistance : 100MΩ Min
Operation Temperature : -40°C to +105°C



Contact Material :Phosphor Bronze
Contact plating : Au Or Sn over Ni
Insulator Material : PBT +30%G.F UL94V-0

Ordering Inforination

PY4202- XX B 01 1

Series NO.	No. of Pos	Color
06P	26P	Insulator
08P	30P	B=Black
10P	34P	
12P	40P	
14P	44P	Contact Plating
16P	50P	01=Gold Flash/Ni
18P	60P	02=Sn
20P	64P	03=3u"Gold/Ni
22P	80P	05=5u"Gold/Ni
24P		15=15u"Gold/Ni
		30=30u"Gold/Ni



				OPERATION	DRAW	DATE	SCALE	FIT	PART NO.	 普亚电线有限公司 PUYER CABLE CO., LTD HTP:www.puyercable.com	普亚电线 TEL:0769-85258775 FAX:0769-85251396 MOB:13711962670 QQ :405131416	思展连接器 TEL:0769-85338949 FAX:0769-85338969 MOB:13925839158 QQ :530589692
			X.	±0.20		2016/06/27	UNIT	mm	PY4202-XXB011			
			X.X	±0.15	CHECK	DATE	SIZE	A4	TITLE:			
AO	2016/06/27	NEW	X.XX	±0.10	APPROVE	DATE	SHEET	1/1	1.27mm DIP PLUG			
REV	DATE	MODIFICATON DESCRIPTION	CHANGE	ANGLES			PROJ.		Customer NO.			
				DIM	TOL							