

$A = 2.54 * NO \text{ of Positions} / 2 + 4.70$
 $B = 2.54 * NO \text{ of Positions} / 2 - 2.54$

NOTES:

Current Rating : 1.0AMP
 Contact Resistance : 20mΩ MAX
 Withstand Voltage : 500V AC/DC
 Insulation Resistance : 1000MΩ Min
 Operation Temperature : -40°C to +105°C


Contact Material : Brass Or Phosphor Bronze
 Contact plating : Au Or Sn over Ni
 Insulator Material : PBT +30%G.F UL94V-0

6P Without Slot " M " and " N "
 8P-12P Without Slot " M " , Without and " N "
 14P-64P With Slot " M " and " N "



Ordering Inforination


PY6202- XX	B	01	B	W	02
Series NO.	No. of Pos	Color Insulator	Contact Material	Piece	
06P	26P	B=Black	B=Brass	02=Two piece	
08P	30P	G=Grey	P=Phosphor Bronze	03=Three piece	
10P	34P				
12P	36P				
14P	40P	Contact Plating		Bump	
16P	44P	01=Gold Flash/Ni		W=With Bump	
18P	50P	02=Sn		N=W/O Bump	
20P	60P	03=3u"Gold/Ni			
22P	64P	05=5u"Gold/Ni			
24P		15=15u"Gold/Ni			
		30=30u"Gold/Ni			

Three piece
 SR P/N:PY6201-XXBXXBX03A

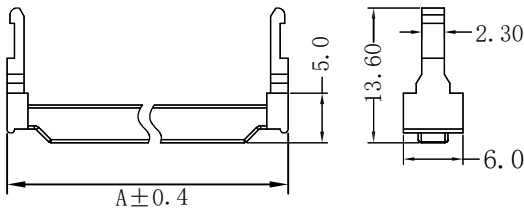

Three piece
 SR P/N:PY6201-XXBXXBX03B

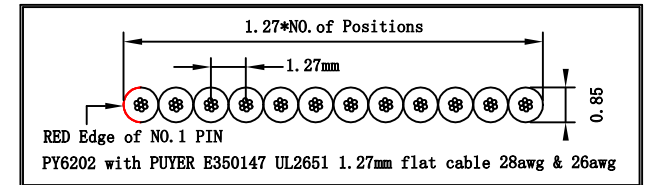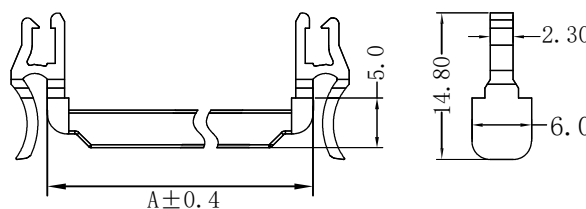

				OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
				X.	±0.20	2016/06/27	UNIT	mm	PY6202-XXB01BW03A
				X. X	±0.15	CHECK	SIZE	A4	TITLE:
AO	2016/06/27	NEW		X. XX	±0.10	APPROVE	SHEET	1/1	2.54 IDC SOCKET+SR Y TYPE
REV	DATE	MODIFICATON DESCRIPTION	CHANGE	ANGLES	±2°		PROJ.		Customer NO.
				DIM	TOL				

PUYER 普亚电线有限公司
 PUYER CABLE CO., LTD
 HTTP:www.puyercable.com

普亚电线
 TEL:0769-85258775
 FAX:0769-85251396
 MOB:13711962670
 QQ :405131416

思展连接器
 TEL:0769-85338949
 FAX:0769-85338969
 MOB:13925839158
 QQ :530589692