



NOTES:
 Current Rating : 1.0AMP
 Contact Resistance : 20mΩ MAX
 Withstand Voltage : 250V AC/DC
 Insulation Resistance : 1000MΩ Min
 Operation Temperature : -40°C to +105°C

Contact Material : Brass Or Phosphor Bronze
 Contact plating : Au Or Sn over Ni
 Insulator Material : PBT +30%G.F UL94V-0

Ordering Inforination

PY6206- XX	G	01	B	01
Series NO.	No. of Pos	Color Insulator	Contact Material	01=No circular hole Type
	10P 26P	B=Black	B=Brass	02=With half circular hole Type
	12P 30P	P=Phosphor Bronze		
	14P 34P	G=Grey		
	16P 40P			
	20P 50P	Contact Plating		
	24P 60P	01=Gold Flash/Ni		
	64P	02=Sn		
		03=3u"Gold/Ni		
		05=5u"Gold/Ni		
		15=15u"Gold/Ni		
		30=30u"Gold/Ni		

With half circular hole Type

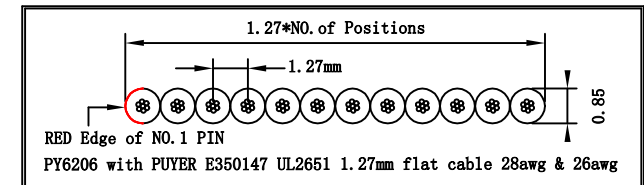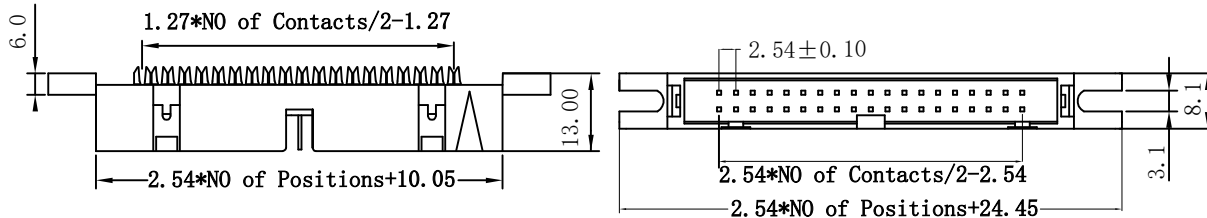

				OPERATION	DRAW	DATE	SCALE	FIT	PART NO.	PUYER 普亚电线有限公司 PUYER CABLE CO., LTD HTTP:www.puyercable.com	
				X.	±0.20	2016/06/27	UNIT	mm	PY6206-XXG01B01		
				X. X	±0.15	DATE	SIZE	A4	TITLE:	普亚电线 TEL:0769-85258775 FAX:0769-85338969 MOB:13711962670 QQ :405131416	
AO	2016/06/27	NEW		X. XX	±0.10	DATE	SHEET	1/1	2.54 BF-N-P		思展连接器 TEL:0769-85338949 FAX:0769-85338969 MOB:13925839158 QQ :530589692
REV	DATE	MODIFICATON DESCRIPTION	CHANGE	ANGLES	±2°	APPROVE			Customer NO.		
				DIM	TOL						