



A=2.54\*N0 of Positions/2-2.54  
B=2.54\*N0 of Positions/2+19.26



**NOTES:**


Current Rating : 1.0AMP  
Contact Resistance : 20mΩ MAX  
Withstand Voltage : 500V AC/DC  
Insulation Resistance : 1000MΩ Min  
Operation Temperature : -40°C to +105°C

Contact Material : Brass Or Phosphor Bronze  
Contact plating : Au Or Sn over Ni  
Insulator Material : PBT +30%G.F UL94V-0


**Ordering Inforination**

**PY6204- XX B 01 B 01**

Series NO.	No. of Pos	Color Insulator	Contact Material	01=No circular hole Type
	10P 26P	B=Black	B=Brass	02=With half circular hole Type
	12P 30P	G=Grey	P=Phosphor Bronze	
	14P 34P			
	16P 40P			
	20P 50P			
	24P			
		Contact Plating		
		01=Gold Flash/Ni		
		02=Sn		
		03=3u"Gold/Ni		
		05=5u"Gold/Ni		
		15=15u"Gold/Ni		
		30=30u"Gold/Ni		

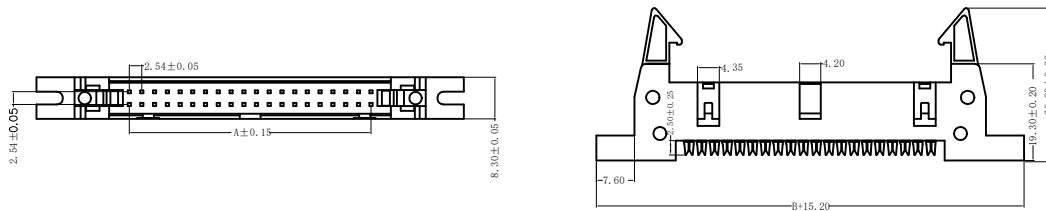

With half circular hole Type

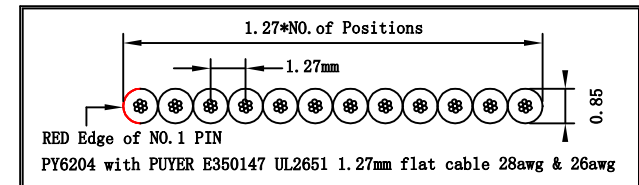

				OPERATION	DRAW	DATE	SCALE	FIT	PART NO.	<b>PUYER</b> 普亚电线有限公司 PUYER CABLE CO., LTD HTTP:www.puyercable.com
				X.	±0.20	2016/06/27	UNIT	mm	PY6204-XXG01B01	
				X.X	±0.15	DATE	SIZE	A4	TITLE:	普亚电线 TEL:0769-85258775 FAX:0769-85251396 MOB:13711962670 QQ :405131416
A0	2016/06/27	NEW		X.XX	±0.10	DATE	SHEET	1/1	2.54 CARD EDGE	
REV	DATE	MODIFICATON DESCRIPTION	CHANGE	ANGLES	±2°	APPROVE	PROJ.		Customer NO.	
				DIM	TOL					