


NOTES:
 Current Rating : 1.0AMP
 Contact Resistance : 20mΩ MAX
 Withstand Voltage : 500V AC/DC
 Insulation Resistance : 1000MΩ Min
 Operation Temperature : -40°C to +105°C

Contact Material : Phosphor Bronze
 Contact plating : Au Or Sn over Ni
 Insulator Material : PBT +30%G.F UL94V-0

Ordering Inforination

PY3204-	XX	B	01	W	02
Series NO.	No. of Pos	Color Insulator	Bump		Piece
	06P 26P	B=Black	W=With Bump		02=Two piece
	08P 30P		N=W/O Bump		
	10P 32P				
	12P 34P				
	14P 40P		Contact Plating		
	16P 44P		01=Gold Flash/Ni		
	18P 50P		02=Sn		
	20P		03=3u"Gold/Ni		
	22P		05=5u"Gold/Ni		
	24P		15=15u"Gold/Ni		
			30=30u"Gold/Ni		

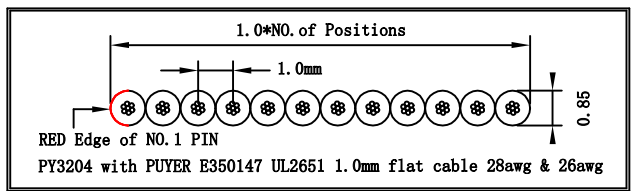

				OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
				X.	±0.20	2016/06/27	UNIT	mm	PY3204-XXB01W02
				X.X	±0.15	DATE	SIZE	A4	TITLE:
AO	2016/06/27	NEW		X.XX	±0.10	DATE	SHEET	1/1	2.0 IDC SOCKET H=5.08
REV	DATE	MODIFICATON DESCRIPTION	CHANGE	ANGLES	±2°	APPROVE			Customer NO.
				DIM	TOL				

PUYER 普亚电线有限公司
 PUYER CABLE CO., LTD
 HTTP:www.puyercable.com

普亚电线 TEL:0769-85258775 FAX:0769-85251396 MOB:13711962670 QQ :405131416	思展连接器 TEL:0769-85338949 FAX:0769-85338969 MOB:13925839158 QQ :530589692
--	---