


A=2.0\*NO of Positions/2-2.0  
B=2.0\*NO of Positions/2+4.20

NOTES:  
Current Rating : 1.0AMP  
Contact Resistance : 20mΩ MAX  
Withstand Voltage : 500V AC/DC  
Insulation Resistance : 1000MΩ Min  
Operation Temperature : -40°C to +105°C

Contact Material : Brass Or Phosphor Bronze  
Contact plating : Au Or Sn over Ni  
Insulator Material : PBT +30%G.F UL94V-0

Ordering Inforination

<b>PY3202-</b>	<b>XX</b>	<b>B</b>	<b>01</b>	<b>01</b>
Series NO.	No. of Pos	Color	Insulator	
	06P 26P		01=Gold Flash/Ni	
	08P 30P	B=Black	02=Sn	
	10P 34P	G=Grey	03=3u"Gold/Ni	
	12P 40P		05=5u"Gold/Ni	
	14P 44P		15=15u"Gold/Ni	
	16P 50P		30=30u"Gold/Ni	
	18P			
	20P			
	22P			
	24P			

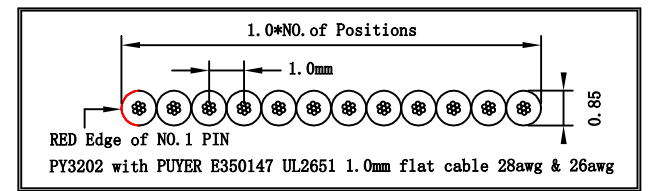

				OPERATION	DRAW	DATE	SCALE	FIT	PART NO.	普亚电线有限公司 PUYER CABLE CO., LTD HTTP:www.puyercable.com
				X.		2016/06/27	UNIT	mm	PY3202-XXB0101	
				X. X	CHECK	DATE	SIZE	A4	TITLE:	普亚电线 TEL:0769-85258775 FAX:0769-85251396 MOB:13711962670 QQ :405131416
AO	2016/06/27	NEW		X. XX	APPROVE	DATE	SHEET	1/1	2.0 DIP PLUG H=5.08	
REV	DATE	MODIFICATON DESCRIPTION	CHANGE	ANGLES			PROJ.		Customer NO.	
				DIM						