

Specifications

备注 (Remark)

1. 材料 (Material)

胶芯: PA9T/LCP+30%G.F UL94V-0, 颜色: 黑色

Housing: PA9T/LCP+30%G.F UL94V-0, Color:Black

端子: 黄铜

Contact: Brass

2. 特性 (characteristics):

额定电流: 1.75AMP

Rating Current:1.75AMP

接触阻抗: 20mΩ MAX

Contact Resistance:20mΩ MAX

绝缘阻抗: 5000MΩ Min







Insulating Resistance:5000MΩ Min

耐电压: 1000V/分钟

Withstanding Voltage:AC 500V/Minute

温度范围: -40℃ to +105℃

Temperture Range:-40℃ to +105℃

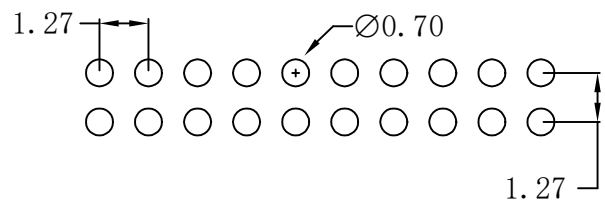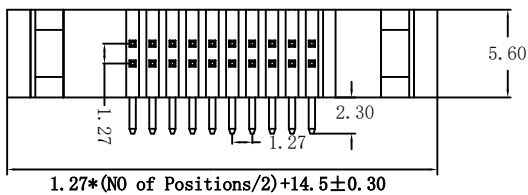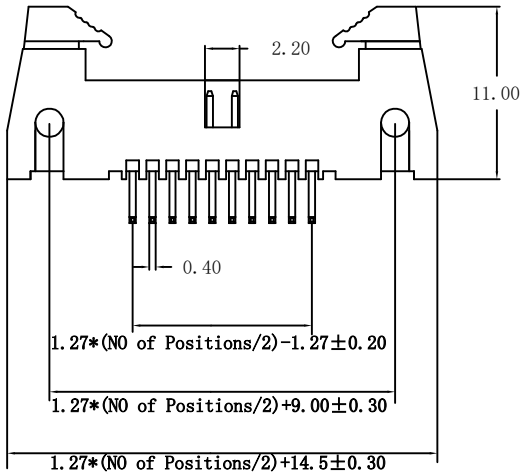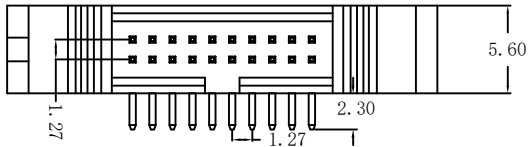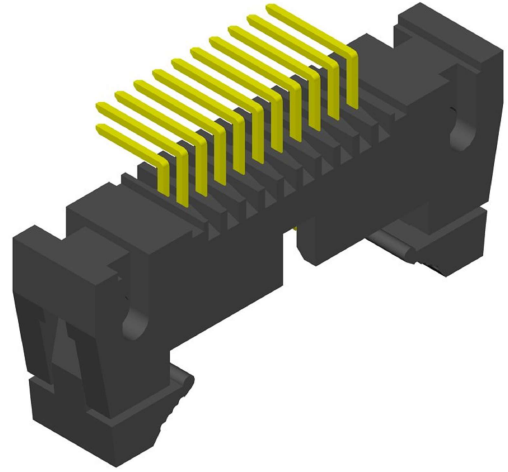

Recommended P.C.B Layout

**EH1272 - X X**

Series NO.

No. of Pos  
10~64P

**X X**

Contact Plating

Full Of Gold  
 A0=0.8u"  
 A1=3u"  
 A2=5u"  
 A3=10u"  
 A5=15u"  
 A9=30u"  
 S1=Full Tinned

**L**

Insulator Material:

L:LCP  
 P:PA9T

**B**

Insulator Color:

B:Black

**2**

Packing

1:PE Bag  
 2:Tray  
 3:Tube  
 4:Tape&Reel

