

Specifications

备注 (Remark)







1. 材料 (Material)

胶芯: PBT/PA9T/LCP+30%G.F UL94V-0, 颜色: 黑色
Housing: PBT/PA9T/LCP+30%G.F UL94V-0, Color:Black
端子: 黄铜

Contact: Brass

2. 特性 (characteristics):

额定电流: 3.00AMP
Rating Current: 3.00AMP
接触阻抗: 20mΩ MAX
Contact Resistance: 20mΩ MAX
绝缘阻抗: 1000MΩ Min
Insulating Resistance: 1000MΩ Min
耐电压: AC 500V/分钟
Withstanding Voltage: AC 500V/Minute
温度范围: -40°C to +105°C
Temperture Range: -40°C to +105°C

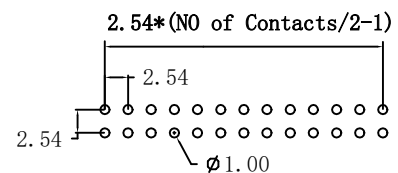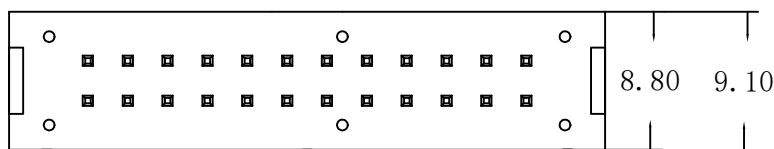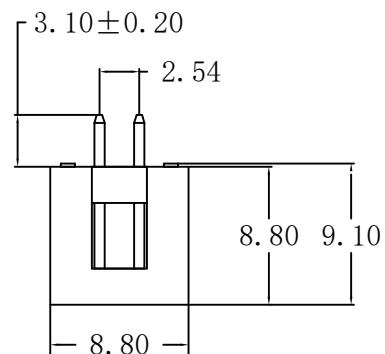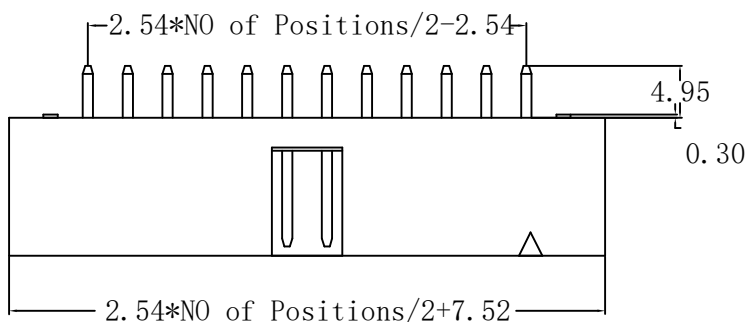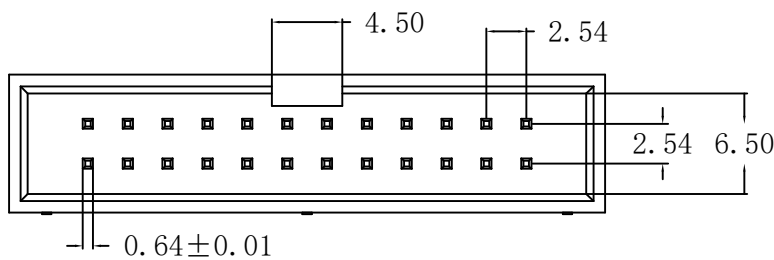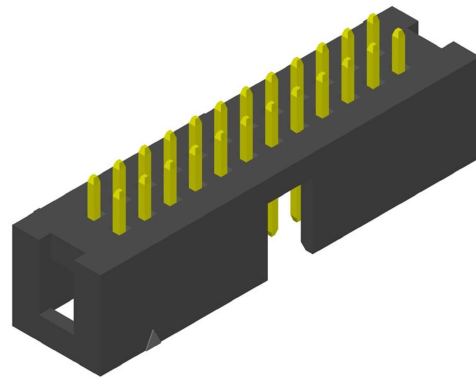

Recommended P.C.
Board Hole Layout

BH2540

Series NO.

X X

No. of Pos
10~64P

X X

Contact Plating
Full Of Gold
A0=0.8u"
A1=3u"
A2=5u"
A3=10u"
A5=15u"
A9=30u"
S1=Full Tinned

A

Insulator Material:
A: PBT
B: PA6T
C: PA9T
D: LCP

B

Insulator Color:
B: Black
G: Grey

2

Packing
1: PE Bag
2: Tray
3: Tube

