

Specifications

备注 (Remark)







1. 材料 (Material)

胶芯: PBT/PA9T/LCP+30%G.F UL94V-0, 颜色: 黑色
 Housing: PBT/PA9T/LCP+30%G.F UL94V-0, Color:Black
 端子: 黄铜

Contact: Brass

2. 特性 (characteristics):

额定电流: 3.00AMP
 Rating Current:3.00AMP
 接触阻抗: 20mΩ MAX
 Contact Resistance:20mΩ MAX
 绝缘阻抗: 1000MΩ Min
 Insulating Resistance:1000MΩ Min
 耐电压: AC 500V/分钟
 Withstanding Voltage:AC 500V/Minute
 温度范围: -40℃ to +105℃
 Temperture Range:-40℃ to +105℃

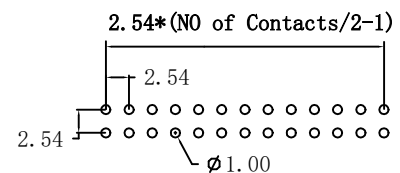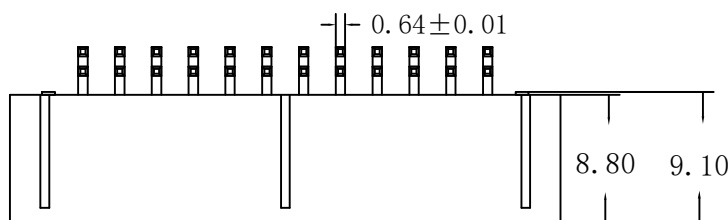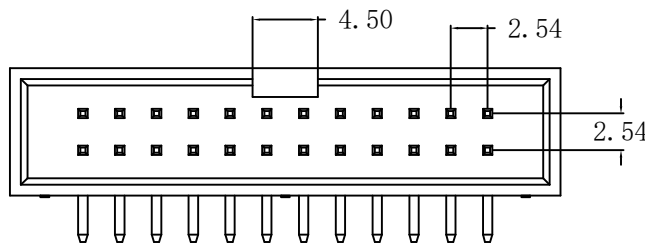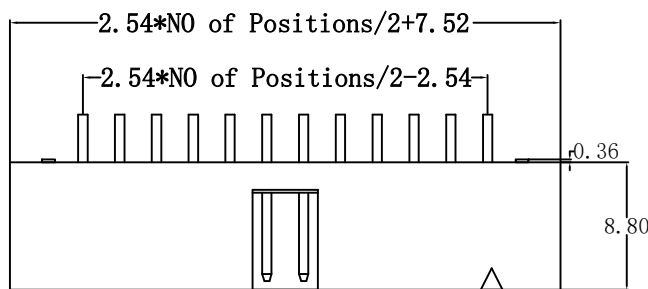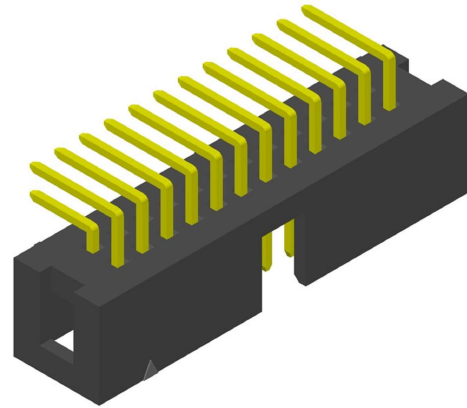

Recommended P.C.
Board Hole Layout

BH2541

Series NO.

X X

No. of Pos
10~64P

X X

Contact Plating
Full Of Gold
A0=0.8u"
A1=3u"
A2=5u"
A3=10u"
A5=15u"
A9=30u"
S1=Full Tinned

A

Insulator Material:
A:PBT
B:PA6T
C:PA9T
D:LCP

B

Insulator Color:
B:Black
G:Grey

2

Packing
1:PE Bag
2:Tray
3:Tube
4:Tape&Reel

