

Specifications

备注 (Remark)

1. 材料 (Material)

胶芯: PA9T/LCP+30%G.F UL94V-0, 颜色: 黑色

Housing: PA9T/LCP+30%G.F UL94V-0, Color:Black

端子: 黄铜

Contact: Brass

2. 特性 (characteristics):

额定电流: 2.00AMP

Rating Current: 2.00AMP

接触阻抗: 20mΩ MAX

Contact Resistance: 20mΩ MAX

绝缘阻抗: 1000MΩ Min






Insulating Resistance: 1000MΩ Min

耐电压: AC 500V/分钟


Withstanding Voltage: AC 500V/Minute

温度范围: -40℃ to +105℃

Temperture Range: -40℃ to +105℃

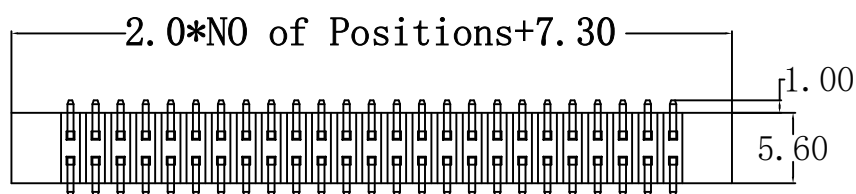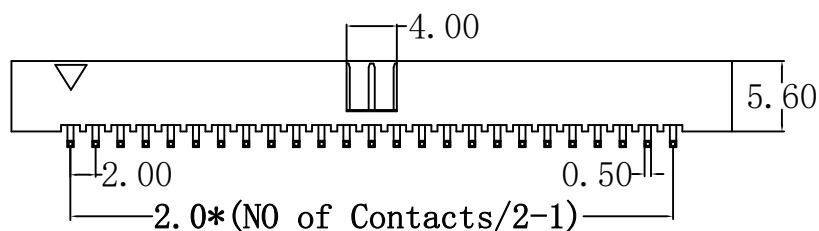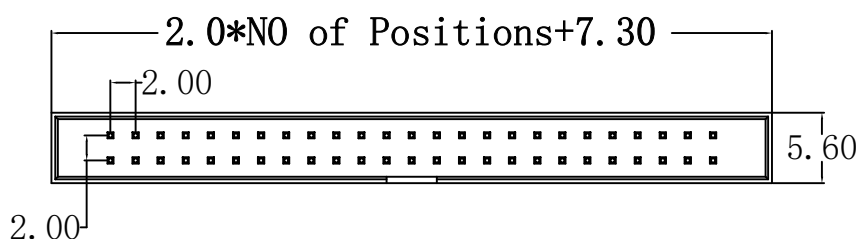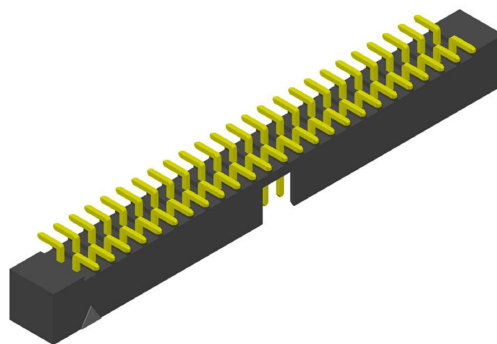

2.0*(NO of Contacts/2-1)

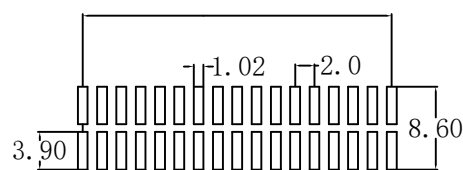

Recommended P.C.
Board Hole Layout

BH2000

Series NO.

X X

No. of Pos
10~64P

X X

Contact Plating
Full Of Gold
A0=0.8u"
A1=3u"
A2=5u"
A3=10u"
A5=15u"
A9=30u"
S1=Full Tinned

A

Insulator Material:
A: PBT
B: PA9T
C: LCP

B

Insulator Color:
B: Black
G: Grey

1

Packing
1: PE Bag
2: Tray
3: Tube
4: Tape & Reel



普亚电线

TEL: 0769-85258775
MOB: 13711962670

Http://www.puyercable.com

FAX: 0769-85251396
QQ: 405131416

思展连接器

TEL: 0769-85338949
MOB: 1392583915

FAX: 0769-85338969
QQ: 530589692

