

Specifications

备注 (Remark)

1. 材料 (Material)

胶芯: PA9T/LCP+30%G.F UL94V-0, 颜色: 黑色

Housing: PA9T/LCP+30%G.F UL94V-0, Color:Black

端子: 黄铜

Contact: Brass

2. 特性 (characteristics):

额定电流: 1.00AMP

Rating Current: 1.00AMP

接触阻抗: 20mΩ MAX

Contact Resistance: 20mΩ MAX

绝缘阻抗: 1000MΩ Min



Insulating Resistance: 1000MΩ Min

耐电压: AC 500V/分钟

Withstanding Voltage: AC 500V/Minute

温度范围: -40℃ to +105℃

Temperture Range: -40℃ to +105℃

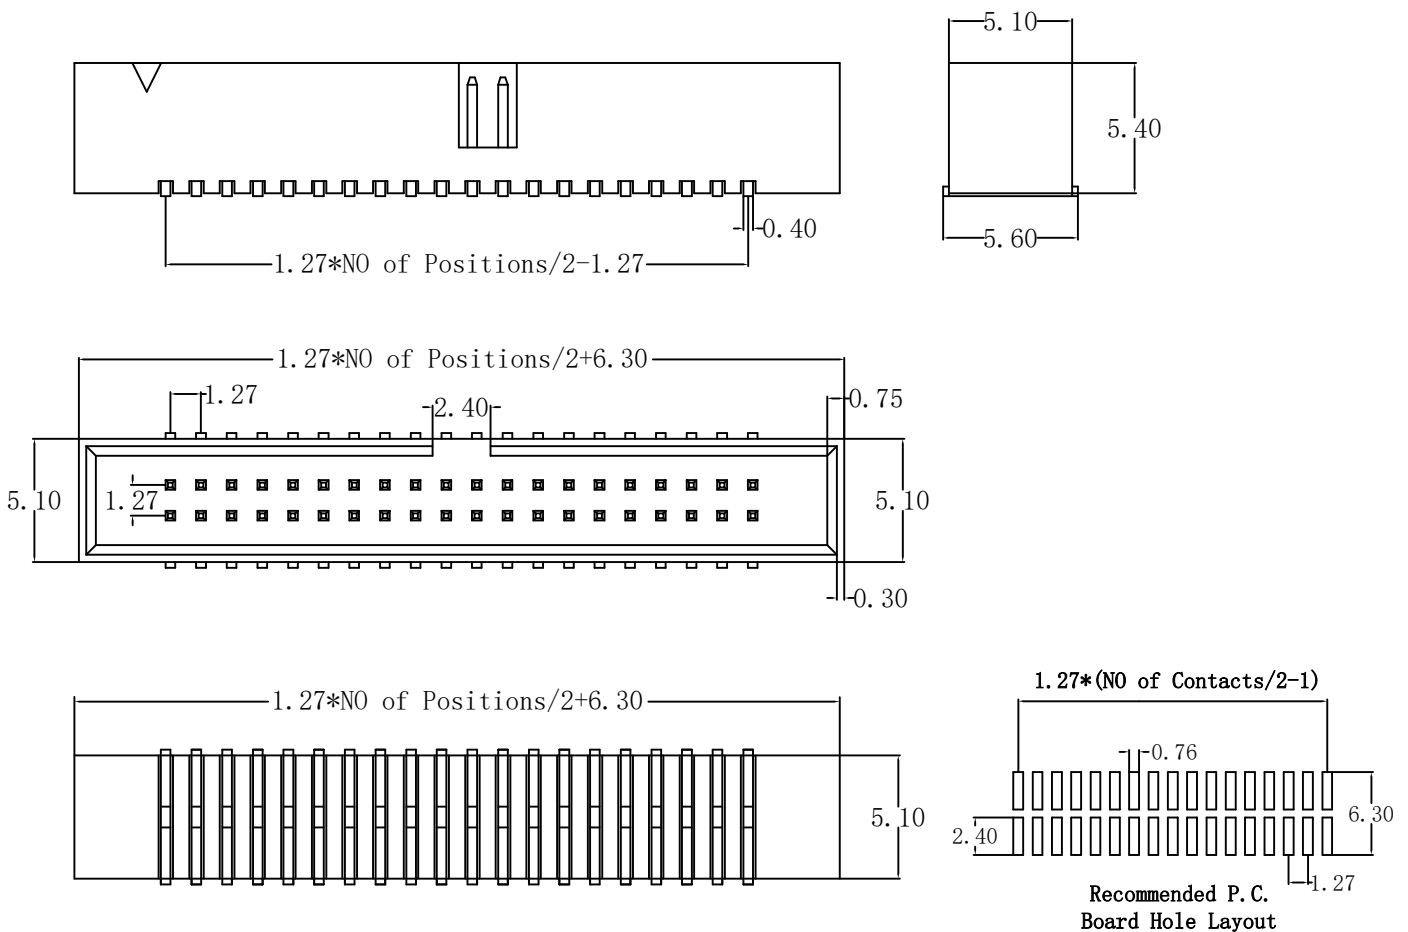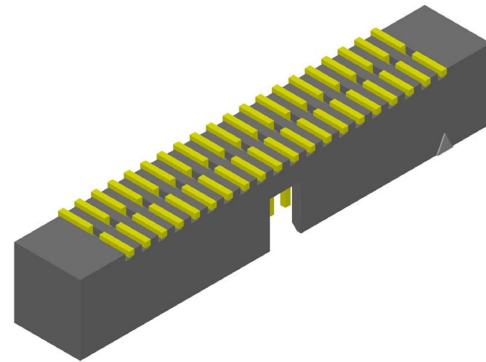

BH1271

Series NO.

X X

No. of Pos  
10~64P

X X

Contact Plating  
Full Of Gold  
A0=0.8u"  
A1=3u"  
A2=5u"  
A3=10u"  
A5=15u"  
A9=30u"  
S1=Full Tinned

A

Insulator Material:  
A: PA9T  
B: LCP

B

Insulator Color:  
B: Black

2

Packing  
1: PE Bag  
2: Tray  
3: Tube  
4: Tape&Reel



普亚电线

TEL: 0769-85258775  
MOB: 13711962670

Http://www.puyercable.com

FAX: 0769-85251396  
QQ: 405131416

思展连接器

TEL: 0769-85338949  
MOB: 1392583915

FAX: 0769-85338969  
QQ: 530589692

